


ASV POSI TRACK PT60



Dimensions:

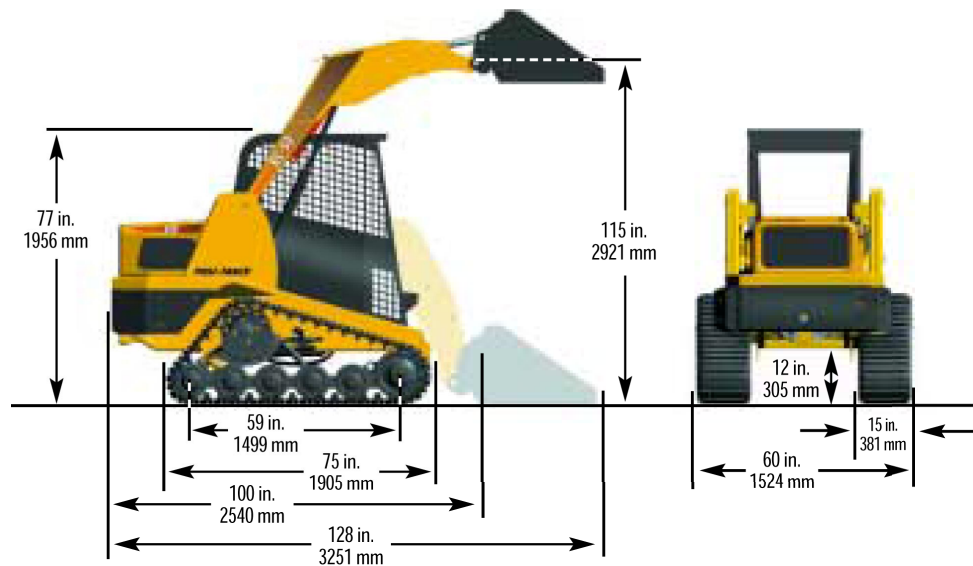

RC50 Rubber Track Loader

RC50 mid sized Rubber Track Loader offers exceptional power, versatility and traction. Ground pressure under the 15 inch wide rubber tracks is only 3.5 psi, making it ideal for work on soft ground conditions and also finished surfaces like sod, landscaping and pavements.

Powered by 50 hp Perkins diesel engine. The RC50 is the ideal solution for tackling demanding jobs in a wide range of environments. The Posi Power Control (PPCTM) control system and industry standard quick attach interface makes it easily connects most skid steer attachments.

Specifications

Machine Weight

Operating weight:	6,200 lb. / 2812 kg.
Shipping weight, w/out bucket:	5,500 lb. / 2495 kg.
Ground pressure:	
@ shipping weight	3.1 psi / 21.4 kPa
@ operating weight	3.5 psi / 24.1 kPa

Track Specifications

Track width:	15 in. / 381 mm
Track length, on ground:	59 in. / 1499 mm
Ground contact area:	1,770 in. ² / 1.14 m ²

Auxiliary Hydraulic Pump

Flow, maximum:	16.3 gpm / 61.7 lpm
Pressure:	3,000 psi / 20 670 kPa

Engine

Type (Diesel):	Perkins 404C-22
Displacement:	134 in. ³ / 2.2 L
Gross power @ 2800 rpm:	50 hp / 37.3 kW
Torque, peak:	105 ft-lb / 143 Nm

Operating Specifications

Tipping load:	3,800 lb. / 1724 kg
Operating capacity 50% tip load*:	1,900 lb. / 862 kg
Operating capacity 35% tip load*:	1,330 lb. / 603 kg
Travel speed, max.:	8 mph / 13 kmh

Service Refill Capacities

Fuel tank:	15 gal. / 56.8 L
Hydraulic tank:	8 gal. / 30.3 L
Engine coolant:	2 gal. / 7.5 L
Engine oil, inc. filter:	2.8 gal. / 10.6 L

