


# BOBCAT S150 & S160



## Dimensions:

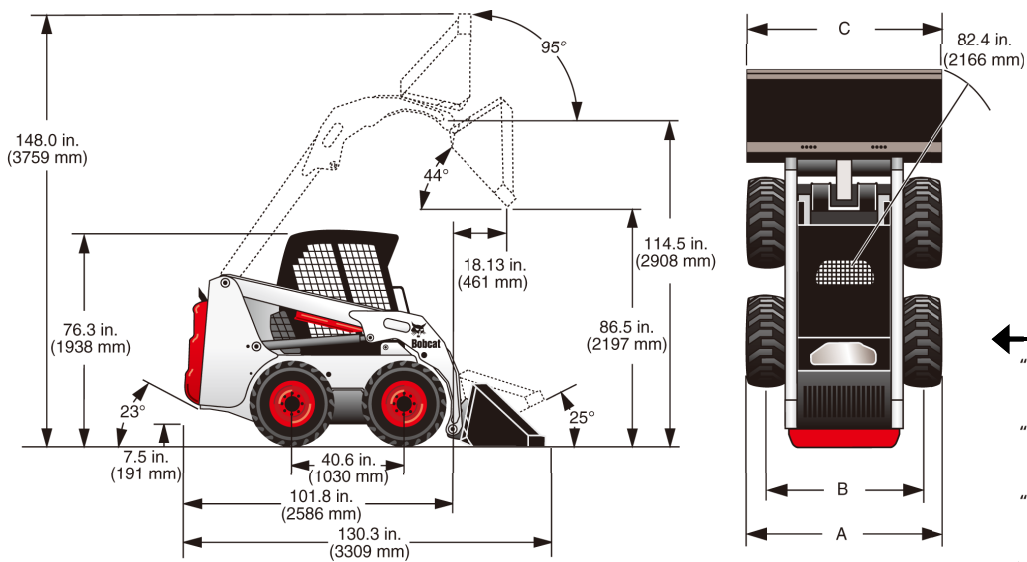

## S150 & S160 Skid Steer Loader



The new Bobcat S150 and the turbo-charged S160 deliver lots of muscle, lift capacity, lift height and travel speed.

Powerful diesel engines produce plenty of traction and breakout force for excavating and handling large loads. There's also a 16.9 gpm hydraulic pump for efficient attachment performance.



## Specifications

### Performance

Rated Operating Capacity<sup>1</sup>  
ROC with Optional Counterweight  
Tipping Load  
Hydraulic Pump Capacity  
High Flow Option  
Travel Speed  
Operating Weight

### S150

1500 lb. (680 kg)  
1600 lb. (726 kg)  
3000 lb. (1361 kg)  
16.9 GPM (64 L/min.)  
7.3 MPH (11.7 km/hr.)  
5662 lb. (2568 kg)

### S160

1600 lb. (726 kg)  
1700 lb. (771 kg)  
3200 lb. (1452 kg)  
16.9 GPM (64 L/min.)  
26.4 GPM (99.9 L/min.)  
7.3 MPH (11.7 km/hr.)  
5752 lb. (2609 kg)

### Dimensions

Length (with bucket)  
Width (with bucket)  
Height  
Height to Bucket Pin

130.3 in. (3309 mm)  
68.0 in. (1727 mm)  
76.3 in. (1938 mm)  
114.5 in. (2908 mm)

130.3 in. (3309 mm)  
68.0 in. (1727 mm)  
76.3 in. (1938 mm)  
114.5 in. (2908 mm)

### Engine

Make/Model  
Fuel/Cooling  
Cylinders  
SAE NET HP/Displacement  
Fuel Tank Capacity

### Tier II Compliant

Kubota/V2203M-DI  
Diesel/Liquid  
4  
46/134 in.<sup>3</sup> (2.2 L)  
24 gal. (90.8 L)

Kubota/V2003M-DI-T  
Diesel/Liquid  
4  
56/122 in.<sup>3</sup> (2.0 L)  
24 gal. (90.8 L)

### Operation

Steering and Drive  
Hydraulics  
Transmission

Forward, reverse, travel speed and steering controlled by two hand levers.  
Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.  
Hydrostatic, four-wheel drive.

### Standard Features

- "A" 10 - 16.5 TIRES - 66.0" (1676 mm) or 60.0" (1524 mm)  
31.5 x 13 - 16.5 TIRES - 66.0" (1676 mm)  
"B" 10 - 16.5 TIRES - 54.5" (1385 mm) or 48.5" (1232 mm)  
31.5 x 13 - 16.5 TIRES - 52.3" (1328 mm)  
"C" 62 in. BUCKET WIDTH - 62.0" (1575 mm)  
68 in. BUCKET WIDTH - 68.0" (1727 mm)  
74 in. BUCKET WIDTH - 74.0 (1880 mm)

- Adjustable Cushion Seat  
Automatically Activated Glow Plugs  
Bobcat Interlock Control System (BICS™)  
Bob-Tach™  
Deluxe Cab  
Dual Path Cooling System  
Engine/Hydraulic Shutdown  
Front Auxiliary Hydraulics  
Front & Rear Lights
- Gauges/Warning Lights  
Lift Arm Support  
Operator Cab  
Parking Brake  
Seat Bar (available for all Bobcat loaders)  
Seat Belt  
Spark Arrestor Muffler (S150 only)  
10-16.5 Bobcat Standard-Duty Tires  
Turbo-Charger (S160 only) (Approved Spark Arrestor)

