


Dimensions:

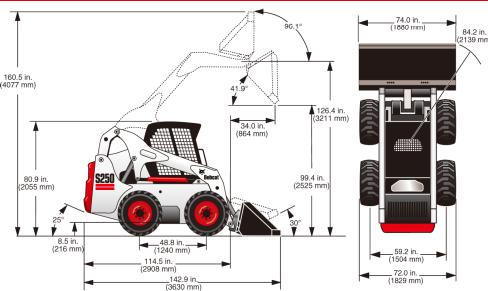

S250 Skid Steer Loader

Power Straight Up!

Natural for working in construction, landscaping, nurseries, masonry, concrete, agriculture and many other applications. Powerful, vertical-path lift arms deliver straight-up strength of over 1100kg Operating Capacity. With that kind of muscle, you can easily handle big loads.

Specifications

Performance

Rated Operating Capacity¹
Tipping Load
Hydraulic Pump Capacity
High Flow Option
Travel Speed
Two-Speed Option — Low Range
— High Range

Operating Weight

Dimensions

Length (with bucket) Width (with bucket) Height Height to Bucket Pin

Engine

Make/Model Fuel/Cooling Cylinders HP/Displacement

Fuel Tank Capacity

Operation

Steering and Drive

Hydraulics

Transmission

Standard Features

S250

2500 lb. (1134 kg) 5000 lb. (2268 kg) 20.7 GPM (78,4 L/min.) 30.9 GPM (116,2 L/min.) 6.9 mph (11,1 km/hr.) 6.9 mph (11,1 km/hr.) 12.0 mph (19,3 km/hr.) 7723 lb. (3503 kg)

6000 lb. (2722 kg) 20.7 GPM (78,4 L/min.) 30.9 GPM (116,9 L/min.) 6.9 mph (11,1 km/hr.) 6.9 mph (11,1 km/hr.)

142.9 in. (3630 mm) 74.0 in. (1880 mm) 80.9 in. (2055 mm) 126.4 in. (3211 mm) 42.9 in. (3630 mm) 4.0 in. (1880 mm) 0.9 in. (2055 mm) 26.4 in. (3211 mm)

Tier II Compliant

Kubota V3300M-DI-T Diesel/Liquid 4 75.0 hp/202.53 in.³ (56,9 Kw/3,318 L)

25 gal. (94,6 L)

Nubota V3300M-DI-Diesel/Liquid 4 81.0 hp/202.53 in.³ (60,4 Kw/3,318 L) 25 gal (94 6 L)

Forward, reverse, travel speed and steering controlled by two hand levers.
Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.
Hydrostatic, four-wheel drive.

Adjustable Cushion Seat Automatically-Activated

Air Intake Heater
Bobcat Interlock Control
System (BICSTM)
Bob-TachTM
Deluxe Cab
Dual-Path Cooling
System
Engine/Hydraulic
Systems Shutdown
Front Auxiliary

Hydraulics

Front & Rear Lights
Gauges/Warning Lights
Lift Arm Support
Operator Cab
Parking Brake
Seat Bar
Seat Belt
12-16.5 Bobcat
Heavy-Duty Tires
Top & Rear Windows
Turbo-Charger (approved
sparkarrestor)



