


# BOBCAT T250



## T250 Compact Track Loader

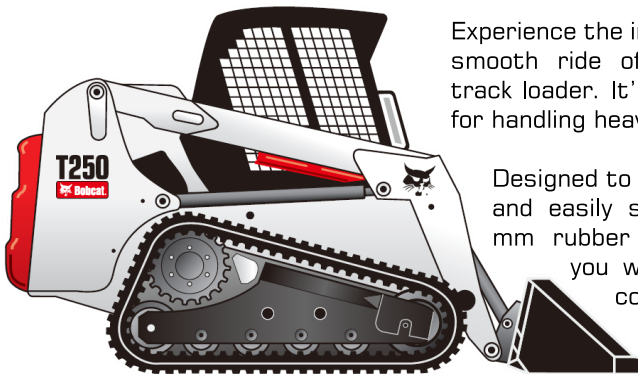

Experience the incredible strength and smooth ride of the T250 compact track loader. It's the perfect machine for handling heavy loads.

Designed to be rugged, dependable and easily serviceable. With 450 mm rubber track system keeps you working in soft ground conditions, taking care of tough jobs in almost any weather.

## Specifications

Loader	T250	Tracks/Undercarriage	
Rated Operating Capacity (ROC) (35% of Tipping Load)	2500 lb. (1135 kg)	Grease Cylinder Track Tensioning	Std
ROC at 50% of Tipping Load	3679 lb. (1669 kg)	Triple-Flange™ Rollers (per side)	5
Tipping Load	7358 lb. (3338 kg)	Length of Track on Ground	63.7 in. (1618 mm)
ROC w/ opt Roller Suspension	2300 lb. (1043 kg)	Track Width - Standard	17.7 in. (450 mm)
Lift Height to Bucket Pin	10 ft. 2 in. (3.1 m)	Ground Pressure (w/ std tracks)	4.0 psi
Lift Arm Path	Radius	Track Width - Optional	12.6 in. (320 mm)
		Ground Pressure (w/ opt tracks)	5.6 psi
		Roller Suspension	Opt

## Size and Speed

Operating Weight	9347 lb. (4240 kg)
Width with bucket	80 in. (2032 mm)
Cab Height	80.9 in. (2055 mm)
Travel Speed	6.6 mph (10.6 km/hr.)

## Engine

	Tier III Compliant
Horsepower	81
Type	Turbo Diesel
Fuel Tank Capacity	30 gal (114 L)
Dual Path Cooling System	Std
Machine Shutdown Protection	Std
Bobcat SmartFAN™	Std
Horsepower Management	

## Control Options

Bobcat Std	Std
Advanced Control System	Opt
Selectable Joystick Controls	Opt

## Machine Features

Operating Lights	Std
Bobcat Interlock Control	Std
ROPS / FOPS	Std
Suspension Seat	Std
Cab with Heat	Opt
Cab with Heat & Air	Opt
Sound Reduction Package	Opt
Deluxe Instrumentation	Opt
Back-up Alarm & Horn	Opt
Keyless Start System	Opt
Hydraulic Bucket Positioning	Opt
Ride Control	Opt

## Dimensions:

